

07-24-00

JC890 U.S. PTO

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 8173

First Inventor or Application Identifier

Jeffrey Hale Blumenthal

Title

METHOD AND APPARATUS UTILIZING SERVO
MOTORS FOR PLACING PARTS ONTO A MOVING
WEB

Express Mail Label No.

EK577219374US

APPLICATION ELEMENTS

See MPEP Chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, D.C. 20231

- 1.
- ☒
- * Fee Transmittal Form (e.g., PTO/SB/17)
-
- (Submit an original, and a duplicate for fee processing)

- 2.
- ☒
- Specification Total Pages [25]
-
- (preferred arrangement set forth below)

- Descriptive Title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R&D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure

- 3.
- ☒
- Drawing(s) (35 USC 113) Total Sheets [13]

4. Oath or Declaration Total pages [2]

- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 16 completed)

- i.
- ☐
- DELETION OF INVENTORS**

Signed statement attached deleting
inventor(s) named in the prior
application, see 37 CFR §§1.63(d)(2) and
1.33(b).

- 5.
- ☐
- Microfiche Computer Program (Appendix)

6. Nucleotide and/or Amino Acid Sequence Submission
-
- (if applicable, all necessary)

- a. ☐ Computer Readable copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

- 7. ☐ Assignment Papers (cover sheet & document(s))
- 8. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
- 9. ☐ English Translation Document (if applicable)
- 10. ☐ Information Disclosure ☐ Copies of IDS
Statement (IDS)/PTO-1449 Citations
- 11. ☐ Preliminary Amendment
- 12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
- 13. ☐ *Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired
- 14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
- 15. ☐ Other:

*** NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY
SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS
REQUIRED (37 C.F.R. §1.27), EXCEPT IF ONE FILED IN A PRIOR
APPLICATION IS RELIED UPON (37 C.F.R. §1.28).**

16. If a
- CONTINUING APPLICATION**
- , check appropriate box and supply the requisite information below and in the preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. /

Prior application information: Examiner: _____ Group/Art Unit: _____

For **CONTINUATION** or **DIVISIONAL** only: The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.**17. CORRESPONDENCE ADDRESS**☐ Customer Number or Bar Code Label

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME Jay A. Krebs

The Procter and Gamble Company

Sharon Woods Technical Center

ADDRESS 11450 Grooms Road

CITY Cincinnati

STATE OHIO

ZIP CODE 45242

COUNTRY USA

TELEPHONE 513-626-4856

FAX

513-626-3400

Name (Print/Type)

JAY A. KREBS

Registration No. (Attorney/Agent)

41,914

Signature

Date 7-21-00

+

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, D.C. 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

METHOD AND APPARATUS UTILIZING SERVO MOTORS FOR PLACING PARTS
ONTO A MOVING WEB

5

Jeffrey Hale Blumenthal

FIELD OF THE INVENTION

10 The present invention relates to a method and apparatus for receiving discrete parts traveling at a speed and applying the parts to a web or other carrier traveling at a different speed.

BACKGROUND OF THE INVENTION

15 Disposable absorbent articles, such as disposable diapers, generally have been manufactured by a process where discrete parts or components of different materials, such as leg elastic, waist elastic, tapes and other fasteners have been applied to a continuously moving carrier web. Often, the speed at which the parts are fed into the process is not the same as the speed of the carrier web itself. Thus, the speed of the parts must be changed to match the speed of the carrier web to properly apply the parts without adversely affecting the process or the finished product.

20 Similarly, labels are typically placed onto articles when the speed at which the labels are fed into the process is not the same as the speed of the article to be labeled. Thus, the speed of the labels must be changed to match the speed of the carrier web to properly apply the parts without adversely affecting the process or the finished product.

25 Several different conventional methods for changing the speed of a part or component of material such that it can be applied to a continuously moving carrier web have been known to those skilled in the art.

30 For example, one method has been known as the slip cut or cut & slip method. A web of material, which is traveling at a slower speed than the carrier web, is fed into a knife and anvil roll having a surface speed equal to speed of the carrier web. The material

slips against the surface of the anvil roll until the knife cuts it into discrete pieces. The purpose of the slip is to ensure the correct amount of material is metered into the system at the desired tension prior to cutting. As the material is cut into the discrete parts, vacuum in the anvil roll is activated to hold the discrete part on the anvil without slipping, so that the discrete part is accelerated to the speed of the anvil roll. The anvil roll then carries the part to the point where the vacuum is released and the parts are applied to the carrier web while both the parts and the carrier web are traveling at the same speed. This method has the main drawback that the coefficient of friction between the material to be cut and the anvil roll must be low enough such that, in conjunction with the holding force keeping the materials in contact, the total tension generated in the material to be cut is not great enough to generate significant elongation in the material to be cut. This elongation, if it occurs, can contribute to high variability in the final cut length and placement of the discrete part on the carrier web.

Another method has used festoons to reduce the speed of the carrier web to match the speed of the discrete parts of material to be applied to the web. An example of this method is described in U.S. Patent No. 5,693,195 issued to Schmitz. The carrier web is temporarily slowed down to the speed of the parts with the excess portion of the carrier web gathering in festoons. The parts of material are then applied to the carrier web while both the parts and the web are traveling at the same speed. The festoons are then released allowing the moving web to return to its original speed. This method has two main drawbacks. First, the carrier web must be festooned and then released; this may damage or otherwise change the properties of the carrier web. Second, the storage system requires a large amount of space in typical disposables production systems because there is a direct relationship between line speed and storage space needed.

Another method has utilized a cam actuated follower arm. The cam actuated follower comprises a cam follower at one end of the arm and a holding plate at the other end of the arm. The cam follower remains in contact with a fixed cam which is mounted concentric with the instantaneous center of rotation of the holding plate. As the holding plate rotates, its radial distance from the center of rotation is increased and decreased to change the surface speed of the holding plate. The discrete parts of material are placed on

the holding plate when it is at its smallest radius so that the speeds match. The plate then extends radially enough during the rotation to match the speed of the plate to the speed of the carrier web. At this point the discrete parts are transferred to the carrier web. This method has two main drawbacks. First, the plate is designed to match the curvature of one radius, not both. This means that either the pick-up of the discrete part or the transfer of the discrete part, or both, will occur across a gap for some part of the transfer. This can lead to a loss of control of the discrete part, which impacts handling of parts under tension, such as leg elastics. Second, to achieve the desired change in speed, the mechanical elements typically used, such as cams or linkages, become fairly large to stay within acceptable design limits for accelerations and rise angles. This size leads to increased cost and reduced flexibility, as the unit must be redesigned for each application.

Another method has utilized noncircular gears to change the speed of a transferring device. The means rotates at a constant radius, but the rotational velocity is varied between a minimum and a maximum to pick up the discrete part at its speed and place the part on the carrier web at its speed. This eliminates the size issues and speed or gap mismatch issues, but relies on mechanical means to achieve the change in rotational velocity. The drawback of this is that new transmission parts (gears or other means) are required each time a change in product design occurs that changes placement pitch length, discrete part length, or other key factors. This can be expensive and time-consuming to change. An example of this method is described in U.S. Pat. No. 6,022,443 issued to Rajala and Makovec.

SUMMARY OF THE INVENTION

In response to the discussed difficulties and problems encountered in the prior art, a new method and apparatus for receiving discrete parts traveling at a speed, changing the speed of the parts to match the speed of a carrier web or body, and applying the parts to the carrier has been discovered.

In one aspect, the present invention concerns an apparatus for receiving discrete parts traveling at a first speed and applying the parts to a carrier traveling at a second speed. The apparatus comprises at least one rotatable transferring device and one driving

mechanism for each transferring device. Each rotatable transferring device comprises at least one shell segment configured to move along an orbital path through a receiving zone where the parts are received and an application zone where the parts are applied to the carrier. The carrier might comprise a continuous moving substrate web, or might be
5 another apparatus such as a drum. The driving mechanism utilizes a programmable motor such as a servo motor to transmit rotational energy to the rotatable transferring device. The driving mechanism may transmit rotational energy to the rotatable transferring device through a direct connection or a transmission interposed therebetween. The transmission may include gear to gear contact or gearboxes.

10 In another aspect, the present invention concerns an apparatus for receiving discrete parts of an elastic material traveling at a first speed and applying the parts to a carrier traveling at a second speed. The parts of the elastic material might already be at the desired tension and elongation length when the apparatus receives them. On the other hand, the parts of the elastic material might be at a lower tension and elongation length
15 than desired when the leading edge is transferred to the apparatus, but might be stretched during the transfer to the apparatus if the apparatus is traveling at a faster speed than the discrete parts. Alternately, the parts might be at a higher tension and elongation than desired when the leading edge is transferred to the apparatus, but can relax to the desired state if the apparatus is traveling at a slower speed than the discrete parts. The change in
20 tension and elongation can be performed uniformly along the entire length of the discrete material part, or can be intentionally varied during the initial transfer by changing the speed of the rotatable transferring means.

In another aspect, the material fed into the transferring device may comprise a continuous web which might be cut into discrete parts while on the transferring device by a
25 knife, hot wire, laser beam, or other method commonly known. Alternatively, the material fed into the system can be broken into discrete parts by acceleration of the rotatable transferring device. This breaking process can be aided by perforating the material at the desired break point prior to arriving at the receiving zone.

In another aspect, the discrete parts can have adhesive or other bonding material
30 applied to them while traveling on the rotatable transferring device. The rotation speed of

the transferring device can be controlled in register with a bonding material applicator such that the bonding material can be applied either intermittently or continuously as the rotatable transferring device rotates.

In another aspect, the discrete parts of material can be modified prior to placement on the carrier to aid in a final bonding process. This modification can come through heat addition, moisture addition, or other known method for altering material properties to aid in the bonding process.

As compared to conventional methods, such as the cut & slip method described above, for changing the speed of a discrete part so that it can be applied to a carrier, utilizing a programmable motor provides the ability to obtain greater changes in speed, to maintain constant speeds for a fixed duration, and to simplify the set-up process when changing from one product to another. Thus, the use of programmable motors can provide a more precise control of the length and placement of the part onto the carrier while offering great flexibility in the type of parts that are to be made.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be more fully understood and further advantages will become apparent when reference is made to the following detailed description of the invention and the accompanying figures. The figures are merely representative and are not intended to limit the scope of the appended claims.

Figure 1 representatively shows an isometric view of one example of an apparatus of the present invention.

Figure 2 representatively shows a schematic side view of the apparatus in Figure 1.

Figure 3 representatively shows a schematic side view of the apparatus used in the present invention arranged in series.

Figure 4 representatively shows a perspective view of an apparatus according to the present invention comprising two transferring devices.

Figure 5 representatively shows a perspective view of the apparatus shown in Figure 4 including a cutting device.

Figure 6 representatively shows a speed profile for a typical motor output.

Figure 7 representatively shows an alternate speed profile for a motor output wherein one of the fixed speed regions has been changed to variable speed.

Figure 8A representatively shows an alternate speed profile for a motor output wherein the rise time β has been decreased to allow for a non-optimal radius without changing the maximum or minimum rotational velocity in the system.

Figure 8B representatively shows an alternate speed profile for a motor output wherein the maximum rotational velocity during the period of transition from receiving to application zone exceeds the average rotational velocity in the application zone to allow for a non-optimal radius.

Figure 8C representatively shows an alternate speed profile for a motor output wherein the minimum rotational velocity during the period of transition from receiving to application zone is less than the average rotational velocity in the receiving zone to allow for a non-optimal radius.

Figure 9a representatively shows a perspective view of an apparatus according to the present invention including an applicator for accomplishing a secondary process on the parts, and two transferring devices comprising multiple shell segments.

Figure 9b is a side view of the apparatus shown in Figure 9a.

Figure 10 representatively shows an isometric view of adjacent shell segments according to the present invention having grooved leading and trailing edges that mesh.

DETAILED DESCRIPTION OF THE INVENTION

The present invention provides a method and apparatus for receiving discrete parts traveling at a first speed and applying the parts to a carrier traveling at a second speed.

The apparatus and method are particularly useful for applying any part to a carrier useful in the making of disposable absorbent articles or for placing labels onto articles. It is readily apparent, however, that the method and apparatus would be suitable for applying any part to a substrate web or carrier of parts.

Referring now to Figures 1 and 2, there is representatively shown an aspect of the invention wherein an apparatus generally indicated at 20 receives discrete parts 30

traveling at a first speed in the direction indicated by the arrow 91 associated therewith and applies the parts 30 to a carrier 80 traveling at a second speed in the direction indicated by the arrow 92 associated therewith. The illustrated example of the apparatus 20, as representatively shown in Figures 1 and 2, further comprises a driving mechanism 61 for transmitting rotational energy to a driven mechanism 71. The driving mechanism 61 includes a connection to the driven mechanism using any technique known to those skilled in the art such as, for example, gear to gear connection, transmission belting and pulleys, gearboxes, direct couplings, and the like or any combinations thereof. For example, in Figure 1 the driving mechanism is connected to a driving gear 62 which transmits rotational energy to a driven gear 72 connected to the driven mechanism 71. In use, the driving gear 62 engages and rotates the driven gear 72 which, in turn, rotates the transferring device 50.

The illustrated example of the transferring device 50 comprises at least one shell segment 51 connected to the driven mechanism 71. The shell segment 51 of the transferring device 50 can be connected to the driven mechanism 71 by any technique known to those skilled in the art such as, for example, bolts, screws, pins, keys and matching key ways, connector parts such as shafting or brackets, welding and the like or combinations thereof. For instance, the shell segment 51 shown in Figure 1 is connected directly to the driven gear 72 by fitting the end of the shell segment 51 into a mating hole in the driven gear 72 and locking it into position with a pin. Similarly, other components of the apparatus 20 can be connected together employing the above described assembly techniques.

The dimensions of the shell segment 51 may vary depending upon the desired output of the apparatus 20 and the size and shape of the discrete articles 30 being transferred. The shell segment 51 may comprise a crescent-shaped member having an outer, peripheral arc length spanning from about 5 degrees to about 340 degrees, an outer radius ranging from about 25 mm to about 500 mm, and a width ranging from about 50 mm to about 750 mm. As the driven mechanism 71 rotates, the transferring device 50 travels in the direction indicated by the arrow 93 as shown in Figure 2. The circumferential, outer peripheral surface of the shell segment 51 defined by an outer radius

, travels along and defines an orbital path that passes through a receiving zone 21 and an application zone 23. The receiving zone 21 and the application zone 23 are defined by the respective regions of the orbital path traveled by the shell segment 51.

The illustrated example of the driving mechanism 61 includes a rotatable circular driving gear 62 connected to an input shaft 63. In this example, the input shaft 63 is the output shaft of the motor 64. The driven mechanism 71 is placed parallel to the driving mechanism 61 such that the driving gear 62 meshes with the driven gear 72 using gear setups known to those skilled in the art. In use, the motor 64 rotates the input shaft 63 which rotates the driving gear 62 which, in turn, rotates the driven gear 72 and transferring device 50.

Alternatively, the driven mechanism 71 may include any mechanism known to those skilled in the art by which rotational energy can be conducted from one shaft to another such as, for example, v-belts, timing belts, continuous chains and the like or combinations thereof. Further, the driven mechanism 71 may include any mechanism known to those skilled in the art by which input velocity can be variably modified to an output source such as, for example, cams, linkages, and the like or combinations thereof as long as the changes in rotational speed are substantially created by the motor 64.

It will be further appreciated that the method and apparatus 20 of the invention can utilize one or, in the alternative, two, three or more combinations of transferring devices 50, driven mechanism 71, driving mechanism 61 and motor 64 in series to achieve the desired application of the discrete parts to the carrier. The different combinations may allow the use of a continuously moving web to supply the discrete parts. In addition, greater speed ratio differentials may be achieved by using combinations of transferring devices, driven mechanisms, driving mechanisms and motors in series.

It will be further appreciated that the method and apparatus 20 of the invention, when used in series, do not need to operate at the same receiving zone 21 and application zone 23. For example, referring to Figure 3, there is representatively shown one apparatus 20A comprising one transferring device 50A connected to a motor 64A by a driving gear 62A and driven gear 72A and a second apparatus 20B comprising one transferring device 50B connected to a motor 64B by a driving gear 62B and a driven gear 72B. Apparatus

20A uses receiving zone 21A to accept parts 30 from a drum 43 while apparatus 20B uses receiving zone 21B to accept parts 30 from the same drum 43 at a different rotational position on said drum.

Another aspect of the invention shown in Figure 4 comprises an apparatus 20 receiving discrete parts 30 of a web of an material 31 traveling at a first speed in the direction indicated by the arrow 94 associated therewith and applies the parts 30 to a carrier 80 traveling at a second speed in the direction indicated by the arrow 95 associated therewith. The illustrated example of the apparatus 20 comprises two rotatable transferring devices, represented by 50A and 50B, for receiving and applying the parts 30. The apparatus 20 further comprises a driving system 60 having two driving mechanisms 61A and 61B, each of which includes a motor 64A, 64B and a driving gear 62A, 62B for transmitting rotational energy to the driven mechanism 71A, 71B represented by the driven gear 72A, 72B.

As illustrated in Figure 4, each transferring device 50A and 50B comprises a shell segment 51A, 51B connected to a driven gear 72A, 72B. As each gear rotates, the transferring devices 50A, 50B travel in the direction indicated by the arrow 96 associated therewith. In use, the circumferential, outer peripheral surface of the shell segments 51A, 51B travels along and defines an orbital path that passes through a receiving zone 21 and an application zone 23 defined by the respective regions of the orbital path traveled by the the shell segments 51A, 51B of transferring devices 50A and 50B.

The size and shape of the shell segments 51A and 51B may vary as the number of shell segments per transferring device changes. For example, if the apparatus includes two transferring devices as representatively illustrated in Figure 4, each shell segment 51A and 51B may have an outer peripheral arc length which spans from about 5 to about 175 degrees of the orbital path of the transferring devices 50A and 50B.

Each driven mechanism 71A, 71B may include any mechanism known to those skilled in the art by which rotational energy can be conducted from one shaft to another such as, for example, v-belts, timing belts, continuous chains and the like or combinations thereof. Further, the driven mechanisms 71A, 71B may include any mechanism known to those skilled in the art by which input velocity can be variably modified to an output

source such as, for example, cams, linkages, and the like or combinations thereof as long as the changes in rotational speed are substantially created by the motor 64. Alternatively, a first driven mechanism may connect to a first transferring device using a first shaft from a driven gear, and a second driven mechanism may be connected to a second transferring device using concentric shafting around the first shaft.

The apparatus 20, as representatively illustrated in Figure 5, may further comprise a cutting device 40 comprising a pinch knife cutter 41 and a knife anvil 42 to sever the continuously moving web of material 31 into discrete parts 30 prior to or concurrent with the transfer of the discrete parts to the shell segments 51A, 51B of the transferring devices 50A, 50B. The pinch knife cutter 41 may comprise a rotary cutter as shown or any other mechanism known to those skilled in the art capable of severing a web of material into discrete parts. In certain aspects of the invention, the knife anvil 42 may be omitted and the pinch knife cutter 41 can be made to sever the web as it is held on the shell segment of the transferring device. Alternately, the continuously moving web of material may be placed directly on the shell segments of multiple transferring devices so that the web lies on multiple segments at once allowing for the planned acceleration of one device to generate a force necessary to sever a single part from the web. Such severing may be facilitated by perforating the web upstream of the receiving zone so that the parts break at a desired perforation during acceleration.

For receiving the parts in the receiving zone, the transferring device, as representatively illustrated in the various configurations of the invention, may further include a gripping mechanism so that the outer concave surface of the shell segment can capture a part in the receiving zone and transport the part to the application zone. For this embodiment, the gripping mechanism may include a vacuum that can be selectively imposed through ports in the shell segment leading to the outer concave surface. For instance, the vacuum may be activated in the receiving zone to seize the parts and deactivated in the application zone to release the parts to the carrier. In this manner, positive control is maintained over the parts at all times during the transfer process. Alternatively, the gripping mechanism may include any technique known to those skilled in

the art for gripping and releasing parts such as, mechanical clamps, electrical clamps, magnetic clamps and the like or combinations thereof.

For transferring the parts to the carrier in the application zone, the apparatus may comprise any of a variety of options known to those skilled in the art such as, adhesive applied on the part, adhesive applied on the carrier, electrostatic charge between the part and carrier, vacuum on the carrier and the like or combinations thereof. Alternately, the transfer can include the generation of a weld between the part and the carrier by any of a variety of means known to those skilled in the art such as, pressure generation at a nip formed between the shell segment and the carrier at transfer, interaction between a pattern on the shell segment and an ultrasonic horn behind the carrier at transfer, and the like, or combinations thereof. In addition, in order to aid the welding process, the part may be modified on the shell segment by energy addition using any mechanism known to those skilled in the art such as, for example, hot air currents, ultraviolet lighting, laser bombardment and the like or combinations thereof.

The use of a programmable motor in the apparatus, as representatively illustrated in the various aspects of the invention described above, provides an inexpensive and adaptable method for receiving parts 30 traveling at a speed and applying the parts to a carrier 80 traveling at a different speed. The variable angular velocity is produced by varying the current supplied to the motor. Since the driven mechanism is coupled to the output of the motor, changes in the angular velocity and position of the motor directly correlate to changes in the angular velocity and position of the transferring device. The current supplied to the motor can be controlled using any of a variety of a methods for programming motors known to those skilled in the art such as, standard cam curve functions, a reference data table containing reference points, desired motor encoder points, and the like or combinations thereof.

The speed profile of a typical motor setting is representatively illustrated in Figure 6. As shown, the programmable motor 64 used to drive the transferring device 50 of the present invention can provide variable angular velocities including periods where the velocity remains constant for a fixed duration. These constant velocity dwell times can be advantageous in the receiving zone 21 and the application zone 23 particularly when the

pick up and transfer occurs over substantial arc lengths of contact. Alternatively, one or more of the constant speed regions can be changed to a controlled variable speed region as representatively illustrated in Figure 7. This would enable the part 30 to be picked up in the receiving zone 21 at a variable speed, which, when the part 30 is elastic, would allow tensions to be varied incrementally therein which may be desirous in certain product features. In another example, the constant speed of the motor 64 in the application zone 23 can be such that the corresponding speed of the transferring device is different from speed of the carrier at transfer. Such speed variations generate tension in the part 30 by incrementally transferring the part 30 in a controlled manner from one means traveling at one surface speed to a second means traveling at a second surface speed.

It will be further appreciated that the velocity of the transferring device 50 outside of the application zone or the receiving zone can be tailored to aid the performance of secondary processes including adhesive application, printing of identification or registration marks, application of bonding aids, moisture addition and the like and combinations thereof. Such changes in velocity may be beneficial by presenting specific velocity profiles or even additional periods of constant velocity, which would allow for more precise interaction with the secondary processes being performed.

Programmable motors, such as those used in the present invention, can be purchased from any number of suppliers of programmable motors such as Rockwell Automation, located in Milwaukee, Wisconsin. Further, the program inputs to the motors can be generated by one of ordinary skill in the art if provided with the analytical representation of the desired output function as representatively illustrated in Figure 6. For instance, the creation of the electronic cam profile for the motor can be developed by first determining the key input variables. The key input variables are based on desired product features, the base design of the apparatus 20 and the desired cycle speed of the apparatus 20. Secondly, the radius of the outer surface of the transferring device 50 is determined. Once the radius is determined, the required cam inputs of rotational velocities, distances traveled and time available for acceleration can be calculated, which serve as the input to the cam profile generator. For example, in a system with the following inputs:

N = the number of transferring devices 71 used in the apparatus 20

H = the number of shell segments 51 per transferring device 71

$L_{s,part}$ = distance from lead edge of first part 30 received in a given transfer to transferring device 50 to lead edge of part 30 received in the next cycle of transfer to a transferring device 50 in the apparatus 20

$L_{s,product}$ = distance from lead edge of first product zone on carrier 80 to which parts 30 are applied in a given transfer from transferring device 50 to lead edge of product zone on carrier 80 to which parts 30 are applied in the next cycle of transfer from a transferring device 50 in the apparatus 20

V_{min} = average surface speed of the shell 51 on the transferring device 50 in receiving zone 21

V_{max} = average surface speed of the shell 51 on the transferring device 50 in application zone 23

τ = cycle time of a given lane of product making

τ_R = time in receiving zone 21, typically of value τ when V_{min} = incoming speed of parts 30

τ_A = time in application zone 23, typically of value $\text{Ratio} * \tau$ when V_{max} = speed of carrier 80

The following dependent variables can be computed:

$$\text{Ratio} = L_{s,part} / L_{s,product}$$

Radius = distance from effective center of rotation of transferring device 50 to outer surface of shell 51 on transferring device 50

$$\tau_{TRANS} = \text{time in transition from } V_{min} \text{ to } V_{max} = N * \tau - \tau_R - \tau_A = (N - 1 - \text{Ratio}) * \tau$$

$$\omega_{min} = \text{average angular velocity of transferring device 50 in receiving zone 21} = V_{min} / \text{Radius}$$

$$\omega_{max} = \text{average angular velocity of transferring device 50 in application zone 23} = V_{max} / \text{Radius}$$

$$\theta_{min} = \omega_{min} * \tau_R = \omega_{min} * \tau$$

$$\theta_{\max} = \omega_{\max} * \tau_A = \omega_{\max} * \text{Ratio} * \tau$$

$$\theta_{\text{transition}} = 2 * \pi / H - \theta_{\min} - \theta_{\max} = 2 * \pi / H - \omega_{\min} * \tau - \omega_{\max} * \text{Ratio} * \tau$$

The Radius may be determined by assuming that the average angular velocity, ω_{ave} , of the transferring device 50 during the transition from the receiving zone 21 to the application zone 23 is equal to $(\omega_{\min} + \omega_{\max}) / 2$. This means that the distance traveled during the transition $\theta_{\text{transition}} = \omega_{\text{ave}} * \tau_{\text{TRANS}}$. However, $\theta_{\text{transition}}$ must also be equal to $2 * \pi / H - \theta_{\min} - \theta_{\max}$. Consequently, by setting the two equations for $\theta_{\text{transition}}$ equal to one another the following expression for Radius is defined.

$$\text{Radius} = (L_{s,\text{part}} * (N + 1 - \text{Ratio}) + L_{s,\text{product}} * (N - 1 + \text{Ratio})) * H / (4 * \pi)$$

Now, given the inputs, one of ordinary skill can determine τ_{TRANS} , ω_{\min} , ω_{\max} , θ_{\min} , θ_{\max} , and $\theta_{\text{transition}}$ which are typical inputs needed for electric cam software programs. The generic cam programs would then create the input table for the motor 64. Note that the Radius is an optimal radius, and not the only possible radius for the set of inputs. The Radius is optimal because it uses the entire transition time for changing the angular velocity of the transferring device 50. By changing the Radius, the actual amount of time required to change speed must change or else the combined conditions of change in angular velocity and change in angular acceleration will not be met. The amount by which the Radius can deviate from the optimum can be changed from optimal depends upon the torque requirements of the system under the new accelerations at the given speed and the capability of the selected motor 64.

Alternately, one of ordinary skill could generate the input table for the motor without the aid of software programs. For example, the cam profile for cycloidal motion having dwells of constant velocity comprises a minimum velocity equal to ω_{\min} , a change in velocity, $\Delta\omega$, equal to $\omega_{\max} - \omega_{\min}$, and a rise time β of the motion equal to $\tau_{\text{TRANS}} / 2$. The resulting function of angular position is as follows:

$$\theta_{act} = \omega_{min} * T \text{ when } 0 \leq \text{time in cycle, } T \leq \tau_R$$

$$\theta_{act} = \omega_{min} * T + \frac{1}{2} * \Delta\omega * \beta * \left(\frac{(T - \tau_R)}{\beta} - \sin \left(\frac{(T - \tau_R) * \pi}{\beta} \right) / \pi \right) \text{ when } \tau_R < T < \tau_R + \beta$$

$$\theta_{act} = \omega_{min} * T + \frac{1}{2} * \Delta\omega * \beta + \omega_{max} * (T - \tau_R - \beta) \text{ when } \tau_R + \beta \leq T \leq \tau_R + \beta + \tau_A$$

$$\theta_{act} = \omega_{min} * T + \frac{1}{2} * \Delta\omega * \beta + \omega_{max} * \tau_A + \frac{1}{2} * \Delta\omega * \beta * \left(\frac{(T - \tau_R - \beta - \tau_A)}{\beta} - \sin \left(\frac{(T - \tau_R - \beta - \tau_A) * \pi}{\beta} \right) / \pi \right) \text{ when } \tau_R + \beta + \tau_A < T \leq \tau$$

Profiles other than the cycloidal profile can be found in Machinery's Handbook, the 25th Edition.

- 10 If a radius is chosen for the transferring device that is not optimum, the transferring device will accomplish the desired changes in velocities, however, the timing for such changes will not correspond to that which is desired. For instance, if the Radius is slightly greater than optimal, using the equations above, the actual distance traveled during the transition is less than needed to position the transferring device 50 at the start of the application zone 23 even though the transferring device 50 achieves the desired angular velocity.

- 15 There are at least three possible ways to achieve speed profiles accommodating pick up and transfer using a non-optimal Radius. First, the rise time β can be decreased by spending more time at ω_{min} as shown in Figure 8A. Secondly, as shown in Figure 8B, the maximum angular velocity in the transition zone can be greater than the ω_{max} in the application zone 23. Thirdly, the minimum angular velocity in the transition zone can be less than the ω_{min} in the receiving zone 21 as shown in Fig. 8C.

- 20 Using the same cam formulas, one can determine the maximum accelerations generated during the motion using the same family of cam profiles. For example, for the cycloidal profile used above, the peak acceleration is $(\Delta\omega * \pi) / (2 * \beta)$. This is important because, for high speed applications, the limiting design factor in the apparatus 20 is motor 64 torque capability at the desired angular velocities. One of ordinary skill in the art can determine total torque requirements for the apparatus 20 for a given application based on the masses and radii of gyration for the different components of the apparatus 20 and the expected accelerations.

As compared to conventional methods for changing the speed of a discrete part so that it can be applied to a continuously moving carrier (such as the slip cut method described above), the use of programmable motors provides the ability to obtain greater changes in speed and to maintain constant speeds for a fixed duration. The fixed speed
5 dwell achieved by programmable motors can be accurately and quickly generated to control the length and placement of the parts. In comparison to the noncircular gear method described above, the use of programmable motors provides the ability to change the profile at will without requiring the fabrication of new parts.

For example, in the various aspects of the invention, the profile generated by the
10 programmable motor 64 is analytically designed such that the rotatable transferring device 50 receives the parts 30 in the receiving zone 21 while maintaining a constant surface speed substantially equal to the speed of the parts 30. Moreover, the output profile of the motor 64 is designed such that the surface speed of the rotatable transferring device 50 changes to a second constant surface speed as the rotatable transferring device 50 moves
15 from the receiving zone 21 to the application zone 23. The term "surface speed," as used herein, refers to the speed of the circumferential, outer peripheral surface of the shell segment 51. The output profile of the motor 64 can be designed such that the speed of the parts 30 being transferred is substantially equal to the speed of the carrier 80 as the parts are applied to the carrier in the application zone 23. The surface speed of the shell
20 segment 50 is maintained substantially constant in the receiving zone 21 and in the application zone 23 from at least about 0 to about 300 degrees of rotation, desirably from about 5 to about 300 degrees of rotation, and more desirably from about 5 to about 240 degrees of rotation of the transferring device 50. In addition, the surface speed increase or decrease of the shell segment 51 as it moves from the receiving zone 21 to the application
25 zone 23 defines a speed ratio of from at least about 100:99 to about 50:1, desirably from about 20:19 to about 25:1, and more desirably from about 10:9 to about 20:1. The term "speed ratio", as used herein, defines the ratio of the surface speed of the shell segment 51 as the parts 30 are applied to the carrier 80 in the application zone 23 to the surface speed of the shell segment 51 as the parts 30 are received in the receiving zone 21.

It has been described above how the required torque and angular speed of the apparatus determine the needed motor capability. For high speed applications common in the manufacture of articles such as diapers, training pants, among other uses, the peak torque requirements of the apparatus 20 combined with the resulting acceleration at the motor 64 will require very high torque to inertia properties in the motor 64. Motors capable of such flux densities are typically of rare earth permanent magnet design or more powerful, and can be purchased from manufacturers of motors such as Rockwell Automation located in Milwaukee, Wisconsin.

In some embodiments it may be necessary to have more than one shell segment per transferring device driven by a single motor, particularly where the process includes secondary operations that are preferably performed at constant speed (see below). It may also be necessary to have multiple shell segments per transferring device in order to increase the radius from the center of rotation to the arcuate outer surface of the shell segments. The radius of a transferring device having a single shell segment may be so small that secondary parts of the design (such as porting airflow for vacuum across the shell segment) may be impractical. Based on the equation above for determining Radius, adding shell segments per transferring device results in an increase in Radius. For example, increasing the number of shell segments per transferring device from one to three triples the Radius.

Additional shell segments generally also result in an increase in motor torque which is determined from the following expression.

$$T = I_{\text{motor}} * \alpha_{\text{motor}} + I_{\text{load}} * \alpha_{\text{motor}} * (N_{\text{driving}}/N_{\text{driven}})^2$$

where

I_{motor} - is the moment of inertia of the motor including anything connected directly to the motor shaft.

α_{motor} - is the angular acceleration of the motor

$N_{\text{driving}}/N_{\text{driven}}$ - the ratio of the number of teeth on the driving gear to the number of teeth on the driven gear.

I_{load} - is the moment of inertia of the load (including the transferring device).

The additional shell segments generally result in an increase in mass moment of inertia of the transferring device, I_{load} . Inertia is a direct function of mass and radius of gyration squared. For a transferring device having three shell segments, the mass can be expected to approximately triple and the radius of gyration can be expected to nearly double. Consequently, the moment of inertia of the transferring device can be expected to be at least ten to twelve times the inertia of an equivalent system having a single shell segment. The increase in inertia results in a decrease in the rotational velocity by a factor of three in a system having three shell segments per transferring device, consequently, the gear ratio, $N_{driving}/N_{driven}$ is increased by a factor of three in order to maintain the required motor acceleration. Overall, the resultant torque requirement for the system having three shell segments per transferring device is 11% greater relative to a transferring device having one shell segment per transferring device. Given that motor capability is the key limiting design factor, an increase of 11% in required torque can be significant and can potentially limit the capacity and application of the apparatus.

There is no restriction on the number of shell segments per motor besides space and inertial concerns, however, the arrangement pattern of multiple devices is limited. For instance, a transferring device having two shell segments per motor cannot be arranged such that any two shell segments on one transferring device are adjacent to one another in sequence without at least one shell segment from a separate transferring device driven by a separate motor interposed between them. Figures 9a and 9b portray an apparatus according to the present invention including an applicator for performing a secondary process on the parts and two transferring devices 150 and 250, each having multiple shell segments. Transferring device 150 comprises three shells 151A, 151B, and 151C and transferring device 250 comprises three shells 251A, 251B, and 251C. Each transferring device is driven by a separate motor 164, 264. As shell segment 151A of transferring device 150 collects a part in the receiving zone 21, the surface speed of shell segments 151A, 151B and 151C are each equal to the receiving speed while the surface speeds of shell segments 251A, 251B, and 251C of transferring device 250 are each equal to either the application speed or some other transitional speed.

Transferring devices comprising two or more shell segments are particularly beneficial where the process includes secondary processes where it is necessary for the part to be moving at a constant speed. As previously described, a secondary process step can be performed on the part such as adhesive application, printing, heating, or moisture application at any point between the receiving zone and the application zone. However, it is preferred to perform the secondary process while the part is moving at constant speed. In applications where the parts are received as a continuous web with no scrap separating the parts during separation, it is preferred that no gaps occur between adjacent shell segments during the transfer in the receiving zone. For instance, where the secondary process involves the application of an adhesive, it is preferred that the parts move at a constant speed during the application with no gaps in between parts so that the metering rate of the adhesive can be constant and not intermittent.

In order to perform a secondary process on the part at a constant speed with no gaps, the secondary process should be performed on the part before the transferring device starts to accelerate. In other words, the time at the receiving speed is lengthened so that the full arc length of the shell segment of the transferring device (assuming that the entire length of the part is required) passes through the process. For example, if the process involves application of an adhesive, then the entire arc length passes underneath the nozzle of the adhesive applicator. This presents a challenge for a transferring device comprising a single shell segment driven by a single motor since the sum of the receiving time, the application time, and the time for the secondary process might exceed the total cycle time. This problem may be resolved by adding a second transferring device having a single shell segment driven by a separate motor or by using a transferring device having more than one shell segment per transferring device.

In an ideal state, as one shell segment finishes receiving a part, the next shell segment in sequence starts receiving a part. Generally, the parts entering the transferring device are part of a continuous web having no spacing in-between at the receiving zone. Consequently in order to have a no gap situation, shell segments in the receiving zone should have no gap between them. However, in reality, variability in motor positioning, head dimensions, gear backlash, etc. can cause the position of the transfer device to have

some variability in rotational position resulting in gaps or even forcible contact therebetween. Since it is not desired to have two transfer devices contact forcibly, there are a few choices that can be made.

First, the shell segments can be fabricated to be a little shorter in arc length than the part to be received, and then the devices can be brought close but not contacting each other. This avoids contact, but does not allow for complete control of the lead and trail edges of the part. This may or may not impact product quality, depending on the part properties. Second, the shell segments can have a shock-absorbing structure on the lead and / or trail edges, so that contact does not generate damage. Depending on the desired cycle life of the transfer device, this might be as simple as placing a compressible foam or as complex as a spring-loaded wall. Third, the shell segments can have mating surfaces which allow the devices to coexist radially and tangentially but not axially. As shown in Figure 10, shell segments 151A and 215A can have grooved or otherwise modified leading and trailing edges that mesh with similarly modified edges on adjacent shell segments.

While particular embodiments and/or individual features of the present invention have been illustrated and described, it would be obvious to those skilled in the art that various other changes and modifications can be made without departing from the spirit and scope of the invention. Further, it should be apparent that all combinations of such embodiments and features are possible and can result in preferred executions of the invention. Therefore, the appended claims are intended to cover all such changes and modifications that are within the scope of this invention.

What is claimed is:

1. An apparatus for receiving parts traveling at a first speed through a receiving zone and applying the parts to a carrier traveling at a second speed through an application zone, the apparatus comprising:
at least one rotatable transferring device for receiving the parts in the receiving zone and applying the parts in the application zone; and
at least one independent driving mechanism for rotating the transferring device, the independent driving mechanism including a programmable motor coupled to the transferring device via a transmitting mechanism for conveying energy therebetween;
wherein the independent driving mechanism maintains the transferring device at a first surface speed in the receiving zone as the transferring device picks up the parts and maintains the transferring device at a second surface speed in the application zone as the transferring device applies the parts to the carrier.
2. The apparatus as defined in claim 1 wherein the first and second surface speeds of the transferring device are substantially constant.
3. The apparatus as defined in claim 1 wherein the first and second surface speeds of the transferring device are variable.
4. The apparatus as defined in claim 2 wherein either the first surface speed of the transferring device or the second surface speed of the transferring device is variable.
5. The apparatus as defined in claim 1 wherein the first surface speed of the transferring device is substantially equal to the first speed of the parts in the receiving zone and the second surface speed of the transferring device is substantially equal to the second speed of the carrier in the application zone.
6. The apparatus as defined in claim 1 wherein the transferring device comprises at least one shell segment having an arcuate outer surface, the shell segment moves along an orbital path that passes through the receiving zone and the application zone during rotation of the transferring device, the shell segment collects the parts in the receiving zone and holds them against the arcuate outer surface before applying the parts to the carrier in the application zone.

7. The apparatus as defined in claim 6 wherein the shell segment utilizes a vacuum, electrostatics, or surface coefficient of friction to hold the parts to the arcuate outer surface.
8. The apparatus as defined in claim 6 wherein the transferring device comprises at least two shell segments.
9. The apparatus as defined in claim 1 wherein the carrier comprises a web substrate, a belt or a drum.
10. The apparatus as defined in claim 1 wherein the transmitting mechanism comprises a direct coupling, gear to gear connection, gearbox or transmission belting and pulleys.
11. The apparatus as defined in claim 8 further comprising an applicator for performing a secondary process on the parts between the receiving zone and the application zone.
12. The apparatus as defined in claim 11 wherein the secondary process involves the application of an adhesive or printing.
13. An apparatus for receiving parts traveling at a first speed through a receiving zone and applying the parts to a carrier traveling at a second speed through an application zone, the apparatus comprising:
 - at least two rotatable transferring devices for receiving the parts in the receiving zone and applying the parts in the application zone;
 - at least two independent driving mechanisms for rotating the transferring devices, the independent driving mechanisms including programmable motors coupled to the transferring devices via transmitting mechanisms for conveying energy therebetween;
 - wherein the independent driving mechanisms maintain the transferring devices at first surface speeds in the receiving zone as the transferring devices pick up the parts and maintain the transferring devices at second surface speeds in the application zone as the transferring devices apply the parts to the carrier.
14. The apparatus as defined in claim 13 wherein the first and second surface speeds of the transferring devices are substantially constant.
15. The apparatus as defined in claim 13 wherein the first and second surface speeds of the transferring devices are variable.


16. The apparatus as defined in claim 14 wherein either the first surface speeds of the transferring devices or the second surface speeds of the transferring devices are variable.
17. The apparatus as defined in claim 13 wherein the first surface speeds of the transferring devices are substantially equal to the first speed of the parts in the receiving zone and the second surface speeds of the transferring devices are substantially equal to the second speed of the carrier in the application zone.
18. The apparatus as defined in claim 13 wherein each of the transferring devices comprises at least one shell segment having an arcuate outer surface, each shell segment moves along an orbital path that passes through the receiving zone and the application zone during rotation of the transferring devices, each shell segment collects the parts in the receiving zone and hold the parts against the arcuate outer surfaces utilizing a vacuum, electrostatics, or coefficient of friction before applying the parts to the carrier in the application zone.
19. The apparatus as defined in claim 18 wherein each of the transferring devices comprises at least two shell segments having arcuate outer surfaces.
20. The apparatus as defined in claim 13, further comprising an applicator for performing a secondary process on the parts between the receiving zone and the application zone.
21. The apparatus as defined in claim 20 wherein the secondary process involves the application of an adhesive or printing.
22. The apparatus as defined in claim 13 further comprising a cutting device wherein a continuous web of material is cut into parts at the receiving zone.
23. The apparatus as defined in claim 22 wherein the cutting device comprises a pinch knife cutter and a knife anvil.
24. A method for receiving parts traveling at a first speed and applying the parts to a carrier traveling at a second speed the method comprising the steps of:
providing at least one rotatable transferring device;
providing at least one independent driving mechanism coupled to the for rotating the transferring device, the independent driving mechanism including a programmable motor coupled to the transferring device;

programming the programmable motor to rotate the transferring device through a receiving zone at a first surface speed to collect the parts and to rotate the transferring device through an application zone at a second surface speed to transfer the parts to a carrier.

APPARATUS


A method and apparatus for receiving parts traveling at a first speed through a receiving zone and applying the parts to a carrier traveling at a second speed through an application zone. The method and apparatus utilizes transferring devices for transporting the parts between the zones. The transferring devices are coupled to programmable servo motors capable of varying the speed of the transferring devices to accommodate the receiving and application processes.

Figure 1

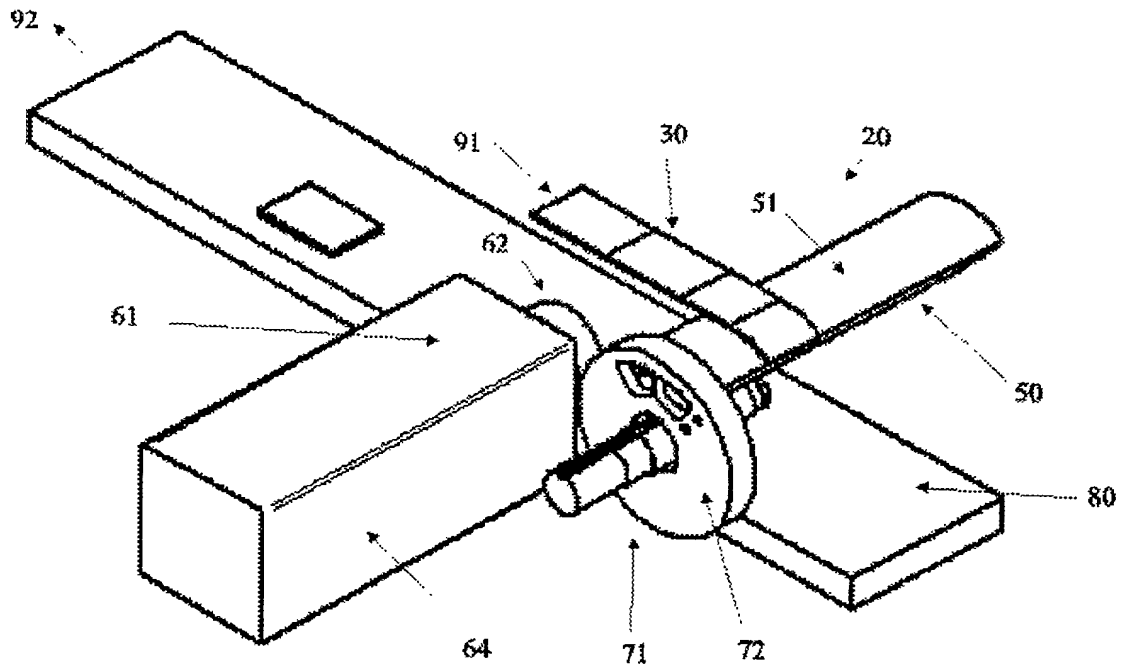

0960867.072100

FIGURE 2

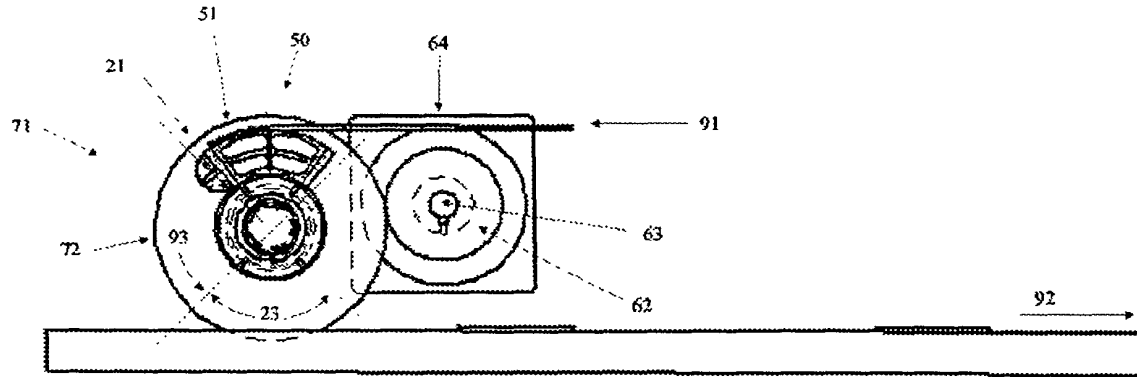

007220 29802960

FIGURE 3



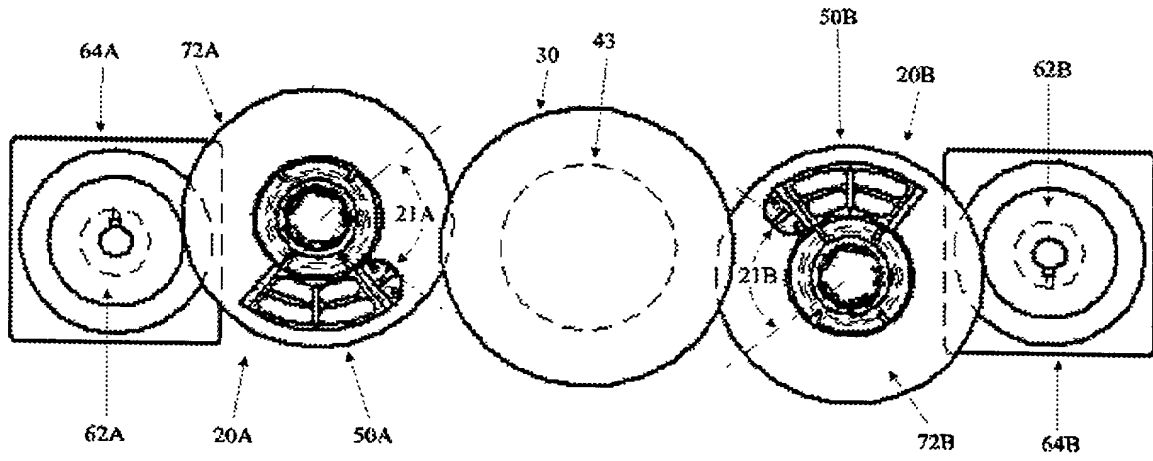


FIGURE 4

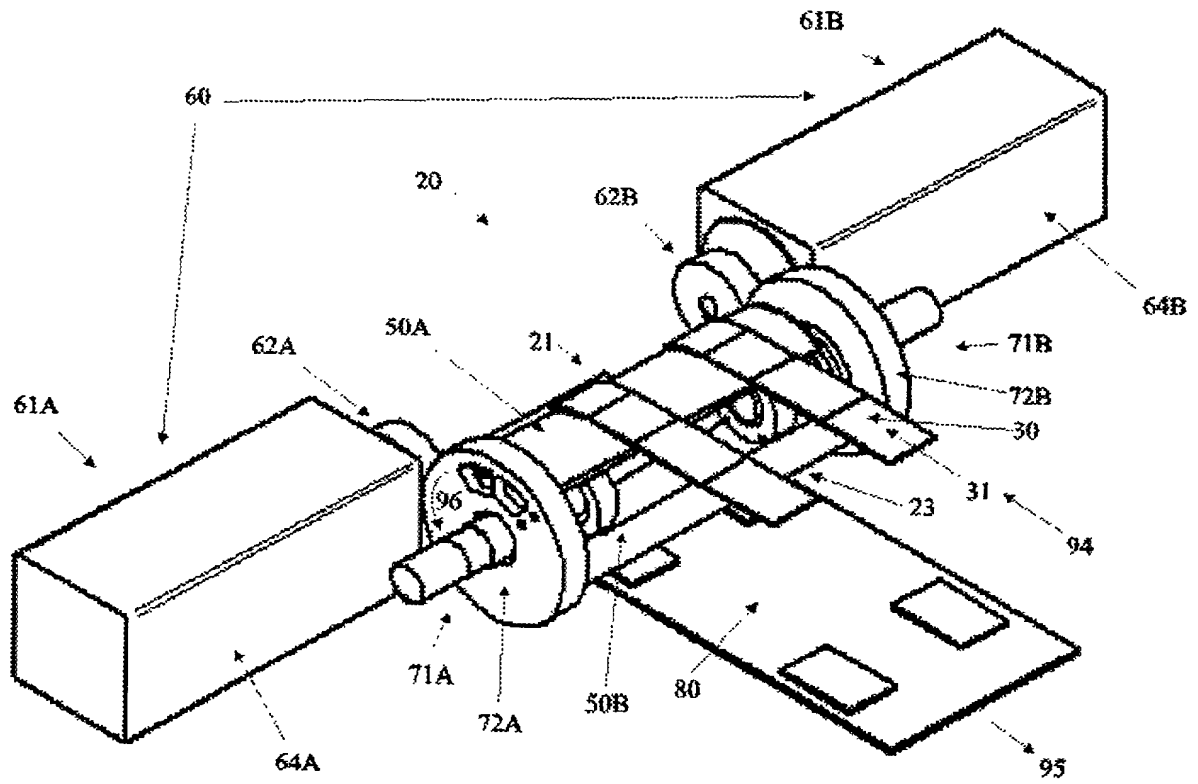

1	0.00000000
2	0.00000000
3	0.00000000
4	0.00000000
5	0.00000000
6	0.00000000
7	0.00000000
8	0.00000000
9	0.00000000
10	0.00000000
11	0.00000000
12	0.00000000
13	0.00000000
14	0.00000000
15	0.00000000
16	0.00000000
17	0.00000000
18	0.00000000
19	0.00000000
20	0.00000000
21	0.00000000
22	0.00000000
23	0.00000000
24	0.00000000
25	0.00000000
26	0.00000000
27	0.00000000
28	0.00000000
29	0.00000000
30	0.00000000
31	0.00000000
32	0.00000000
33	0.00000000
34	0.00000000
35	0.00000000
36	0.00000000
37	0.00000000
38	0.00000000
39	0.00000000
40	0.00000000
41	0.00000000
42	0.00000000
43	0.00000000
44	0.00000000
45	0.00000000
46	0.00000000
47	0.00000000
48	0.00000000
49	0.00000000
50	0.00000000
51	0.00000000
52	0.00000000
53	0.00000000
54	0.00000000
55	0.00000000
56	0.00000000
57	0.00000000
58	0.00000000
59	0.00000000
60	0.00000000
61	0.00000000
62	0.00000000
63	0.00000000
64	0.00000000
65	0.00000000
66	0.00000000
67	0.00000000
68	0.00000000
69	0.00000000
70	0.00000000
71	0.00000000
72	0.00000000
73	0.00000000
74	0.00000000
75	0.00000000
76	0.00000000
77	0.00000000
78	0.00000000
79	0.00000000
80	0.00000000
81	0.00000000
82	0.00000000
83	0.00000000
84	0.00000000
85	0.00000000
86	0.00000000
87	0.00000000
88	0.00000000
89	0.00000000
90	0.00000000
91	0.00000000
92	0.00000000
93	0.00000000
94	0.00000000
95	0.00000000
96	0.00000000
97	0.00000000
98	0.00000000
99	0.00000000
100	0.00000000

FIGURE 5

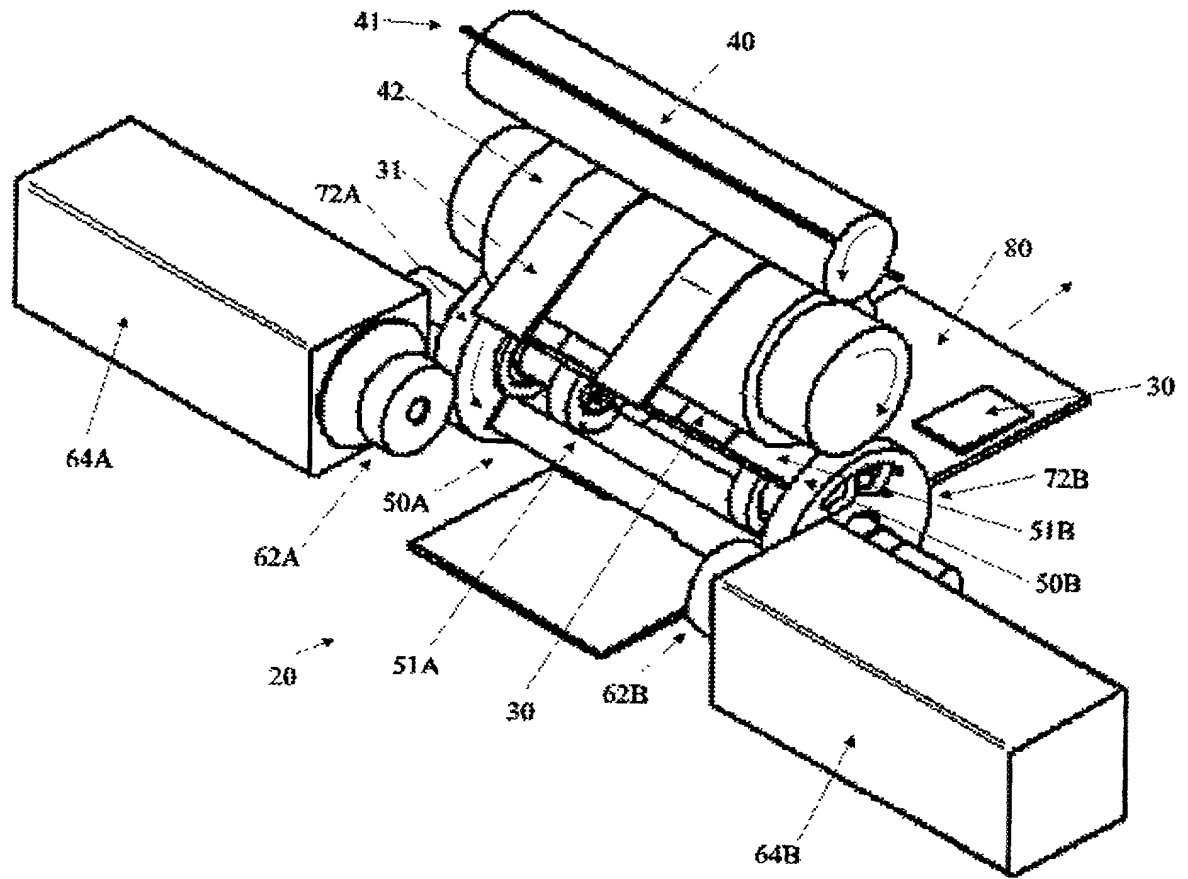

W

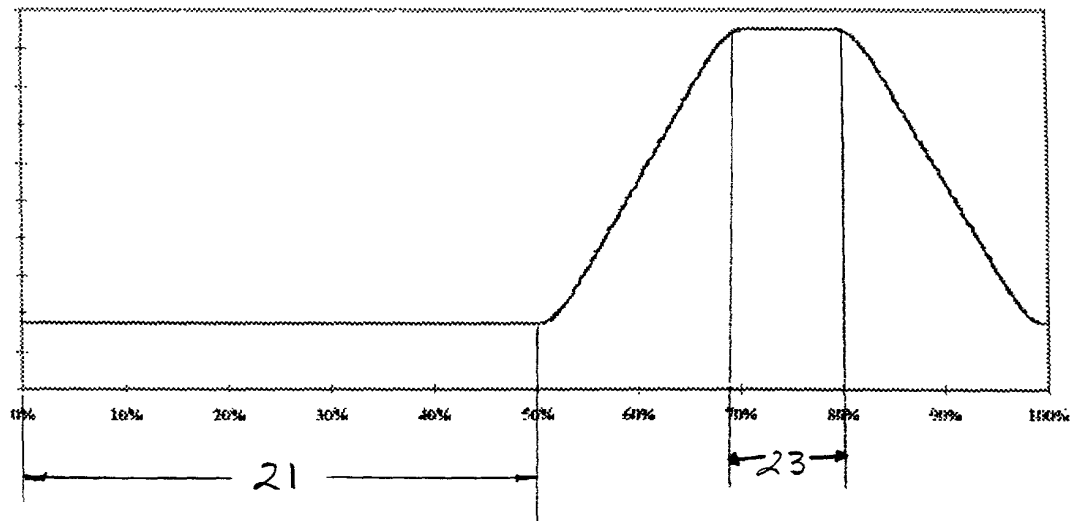


Figure 6

00720 25802300

w

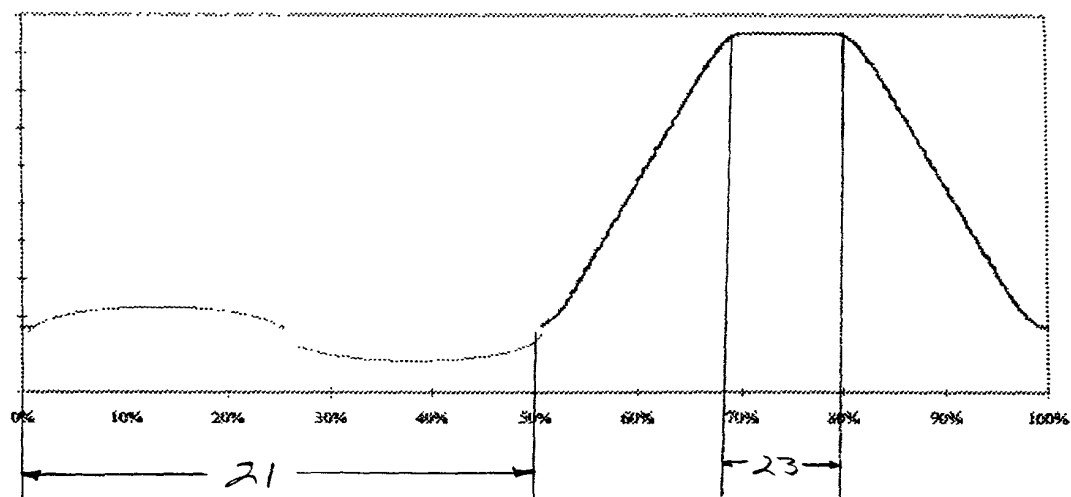


Figure 7

0012015802360

W

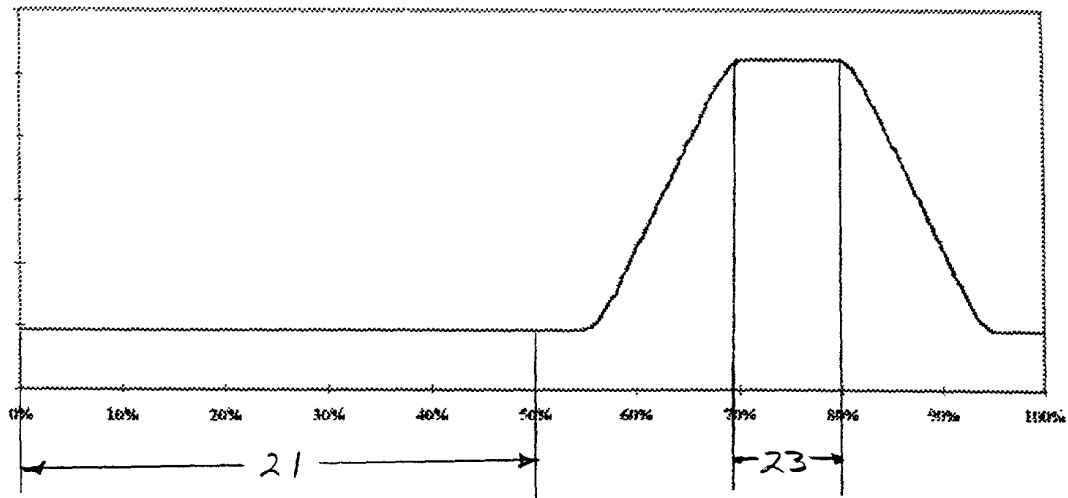


Figure 8a

0060867 072100

W

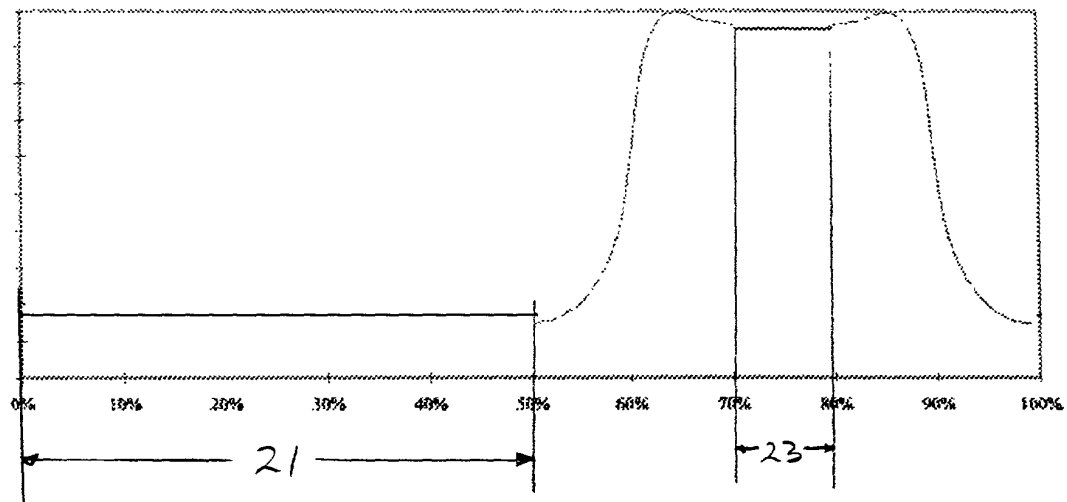


Figure 8b

W

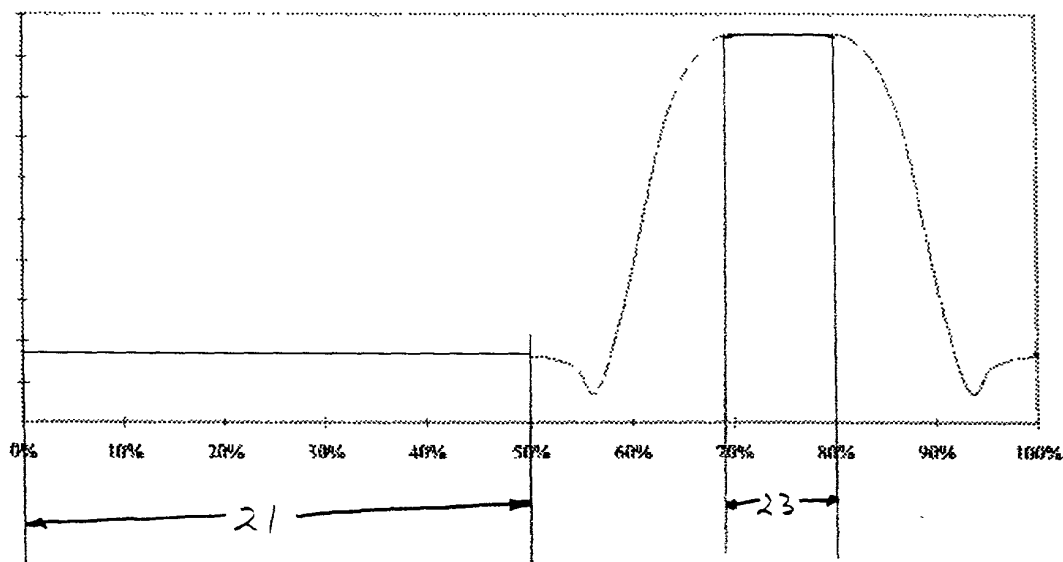


Figure 8c

FIGURE 9A

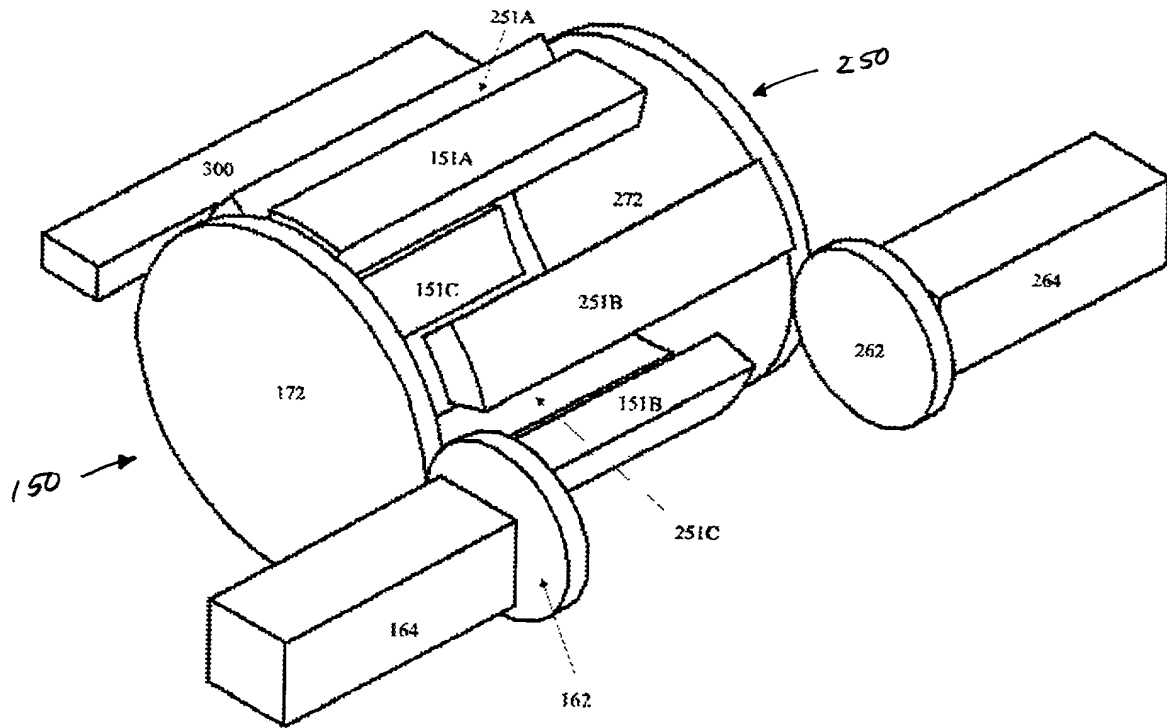


FIGURE 9B


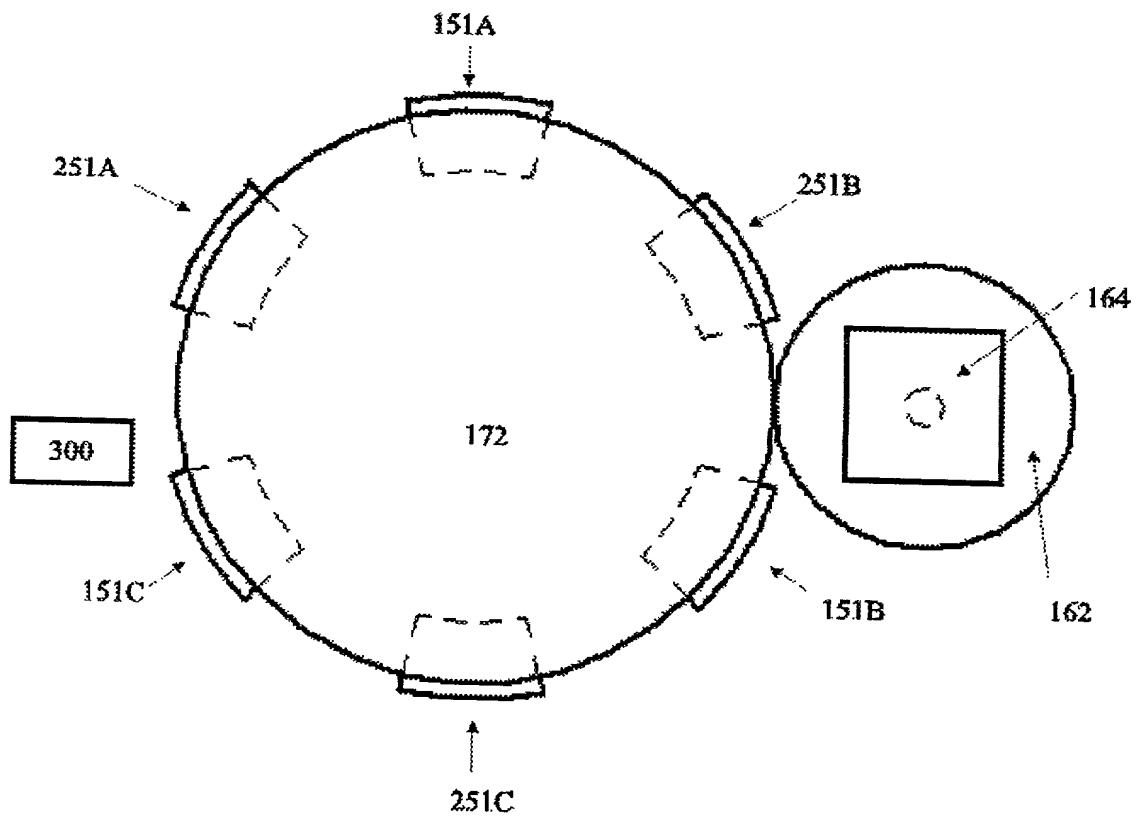


FIGURE 10

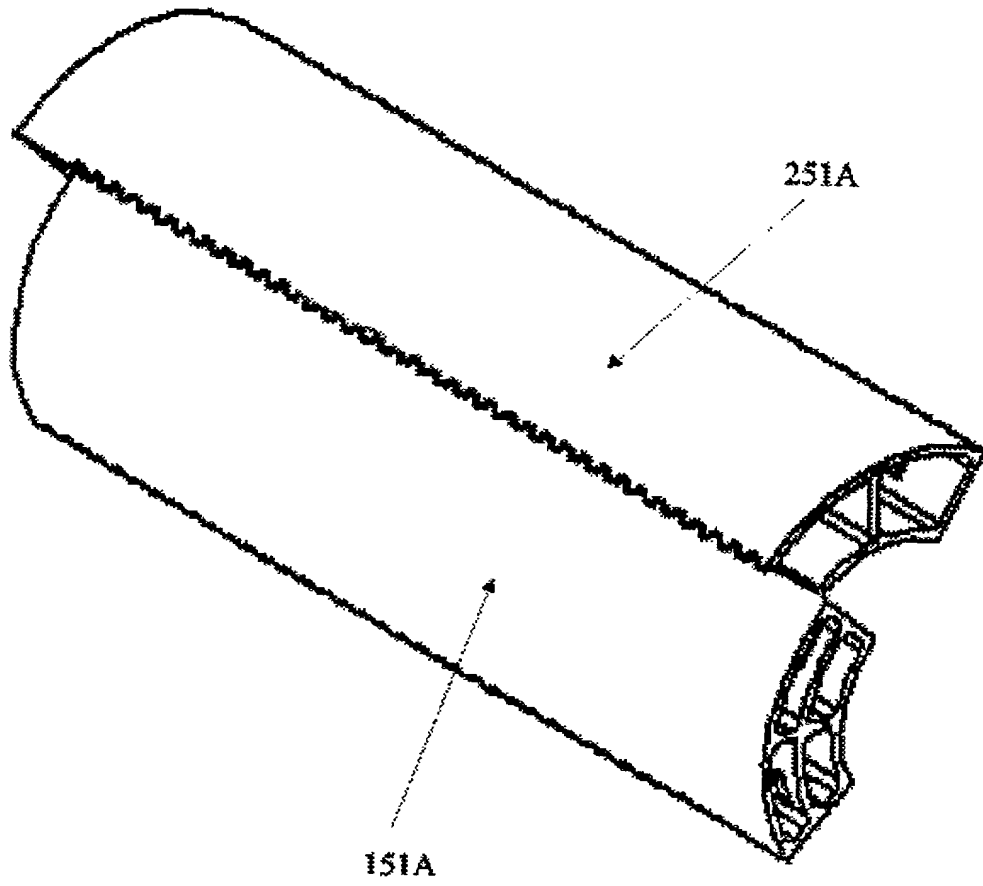

007220-29802960 09520867-072400

DECLARATION COMBINED WITH POWER OF ATTORNEY

Page 1 of 2

Attorney Docket No. 8173

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled METHOD AND APPARATUS UTILIZING SERVO MOTORS FOR PLACING PARTS ONTO A MOVING WEB

the specification of which

(check ☒ is attached hereto.
one) ☐ was filed on _____ as United States Application No. or
PCT International Application Serial No. _____
and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations §1.56.

I hereby claim foreign priority benefits under Title 35 United States Code §119(a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT International application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

Application Serial No.	Filing Date	Application Serial No.	Filing Date

I hereby claim the benefit under Title 35 United States Code §120 of any United States application(s), or §365(c) of any PCT International application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35 United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (If applicable)

As named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Atty Name	Atty Reg Number.	Associate Power of Attorney Attached
Jay A. Krebs	41,914	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
David M. Weirich	38,361	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Steven W. Miller	31,984	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Ken K. Patel	33,988	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Michael S. Kolodesh	44,846	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Joan B. Tucker	43,962	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Timothy B. Guffey	41,048	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

SEND CORRESPONDENCE TO:

Attorney or Agent's Name: Jay A. Krebs

The Procter & Gamble Company (513) 626-4856

Company Name Phone No.

11450 Grooms Road Cincinnati Ohio 45242

Street City State Zip Code

Inventor's signature *Jeffrey Blumenthal* Date 21 July 2000
Residence 4092 Woodmont Drive, Batavia, OH 45103
Citizenship U.S.A.
Post Office Address 4092 Woodmont Drive
Batavia, OH 45103

(Decl.doc)
REVISED 12/97
PO(Same as Residence) 12/99

[illegible]